

HMF 2320K-RCS



POWER TO LIFT

The HMF 2320K-RCS is a sturdy, fast and flexible crane with a lift-to-weight ratio amongst the best on the market.



Main benefits

- Excellent lift-to-weight ratio
- Very large stabilizer spread
- Automatic load-dependent stability system

Crane with extra precision

The HMF 2320K-RCS has a wide variety of options, so it will fit your exact needs. The low tare weight and reduced space requirements of the crane enable higher loading capacity on the truck body and savings on fuel.

The design of the crane with internal hose routing leaves fewer parts exposed for external damage, which also contributes to reducing the cost of ownership.


The service-friendly construction is furthermore designed to make maintenance very easy and increase the lifespan of your crane.

PERFORMANCE	2320-K2	2320-K3	2320-K4	2320-K5	2320-K6	2320-K7	2320-K8
Load Moment (tm)	20,8	20,3	19,9	19,4	19	18,6	18,3
Hydraulic reach (m)	8,3	10,3	12,5	14,8	17,1	19,3	21,6
Weight excl. stabilizers (Kg)	1870	2025	2210	2350	2475	2580	2665
Weight of stabilizers, standard (Kg)	290	290	290	290	290	290	290
Lift-to-weight ratio	9,6	8,8	8	7,3	6,9	6,5	6,2
Slewing Angle (°)	400	400	400	400	400	400	400
Slewing torque (kgm)	2763	2763	2763	2763	2763	2763	2763
Working pressure (bar)	365	365	365	365	365	365	365
GEOMETRY							
Height above mounting surface (mm)	2295	2295	2295	2295	2295	2295	2335
Width, folded, standard (mm)	2500	2500	2500	2500	2500	2500	2500
Length of crane, no extra valves (mm)	885	885	885	885	885	995	995


Lifting Capacity




2320-K2-RCS




2320-K3-RCS




FJ700-K4



2320-K4-RCS




FJ700-K3




FJ700-K4




2320-K5-RCS




2320-K6-RCS

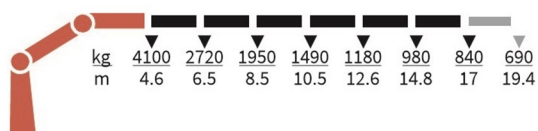

2320-K7-RCS

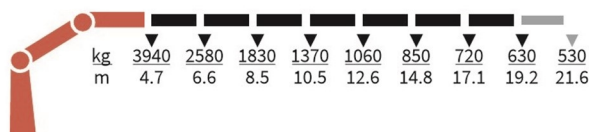

2320-K8-RCS

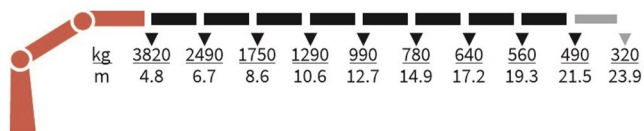

Basics

HMF 2320K-RCS

Electronic speed adaptation system, HDL-d
Slew braking control
Progressive crane control
Priority flow control
Dual power plus link arm system
Proportional control valve PVG 32
Internal hose routing
Environmentally friendly quality coating
RCL safety system


Options

Control stations
Personnel basket on crane – MEWP
Top seat RC
Heated seat
High stand flexible
Control systems
Radio remote control Maxi
Radio remote control Mini
Electrical options
Spotlight
Voltage
Extra valves
Extra valves in hose guides
Extra valves in hose guides, raised
Extra valves in hose reels, internally led
Extra valves in hose reels, externally led
Multi-coupling
Fly-jib
Fly-jib 700
Personnel basket on Fly-jib
Hydraulic hoist
Hydraulic hoist 1500
Hydraulic hoist 2500
2-part snatch block
Hydraulics
4 manually controlled available stabilizer functions
2 manually controlled available stabilizer functions
1-4 available radio remote-controlled functions
Hydraulic functions for separate traverse
3rd extra valve
Hose kit for 1 extra valve led to the jib
Biodegradable oil
Oil tank 150 l mounted on the crane
Ball valve for tank
Oil cooler, medium
Oil cooler, large
Oil tank 90 l mounted on the crane
Radio remote control of stabilizer beams and stabilizer legs on crane
Mechanical options
Manual extension

Hook for manual extension
Crane orientation
Shielding of load-holding valve
Shielding of jib cylinder
Mounting bolt kit
Fittings for mounting bolt kits
Stability and safety
Electronic vehicle stability - EVS
AutoSwitch
Cylinder limitation
Cylinder and beam limitation
2-section Cylinder and beam limitation
Cabin anti-crash
2-stage load moment limitation
Preparation for alternative stability system
Stabilizer duty control
Alarm flash on stabilizer legs
Calibration bypass
Light tower
Temperature monitoring
High stand safety system - quadrant
Quadrant operator protection system
Beam and height warning
Beam and park warning
Stabilizer leg warning
Stabilizer beams and legs
Hydraulic stabilizer beams 5.6 m - 7.4 m
Hydraulic swing-up stabilizer legs
Manual swing-up stabilizer legs with gas spring
Manual swing-up stabilizer legs
Fixed vertical stabilizer legs
Fixed vertical stabilizer legs, long
Footplate with ball joint
Footplate extended
Manual stabilizer beams 5.6 m
Colours
RAL colors

Lifting capacity diagram, K2

Catalogue no.	Section
31 129	222
Date	Page
31-08-2018	1 (1)

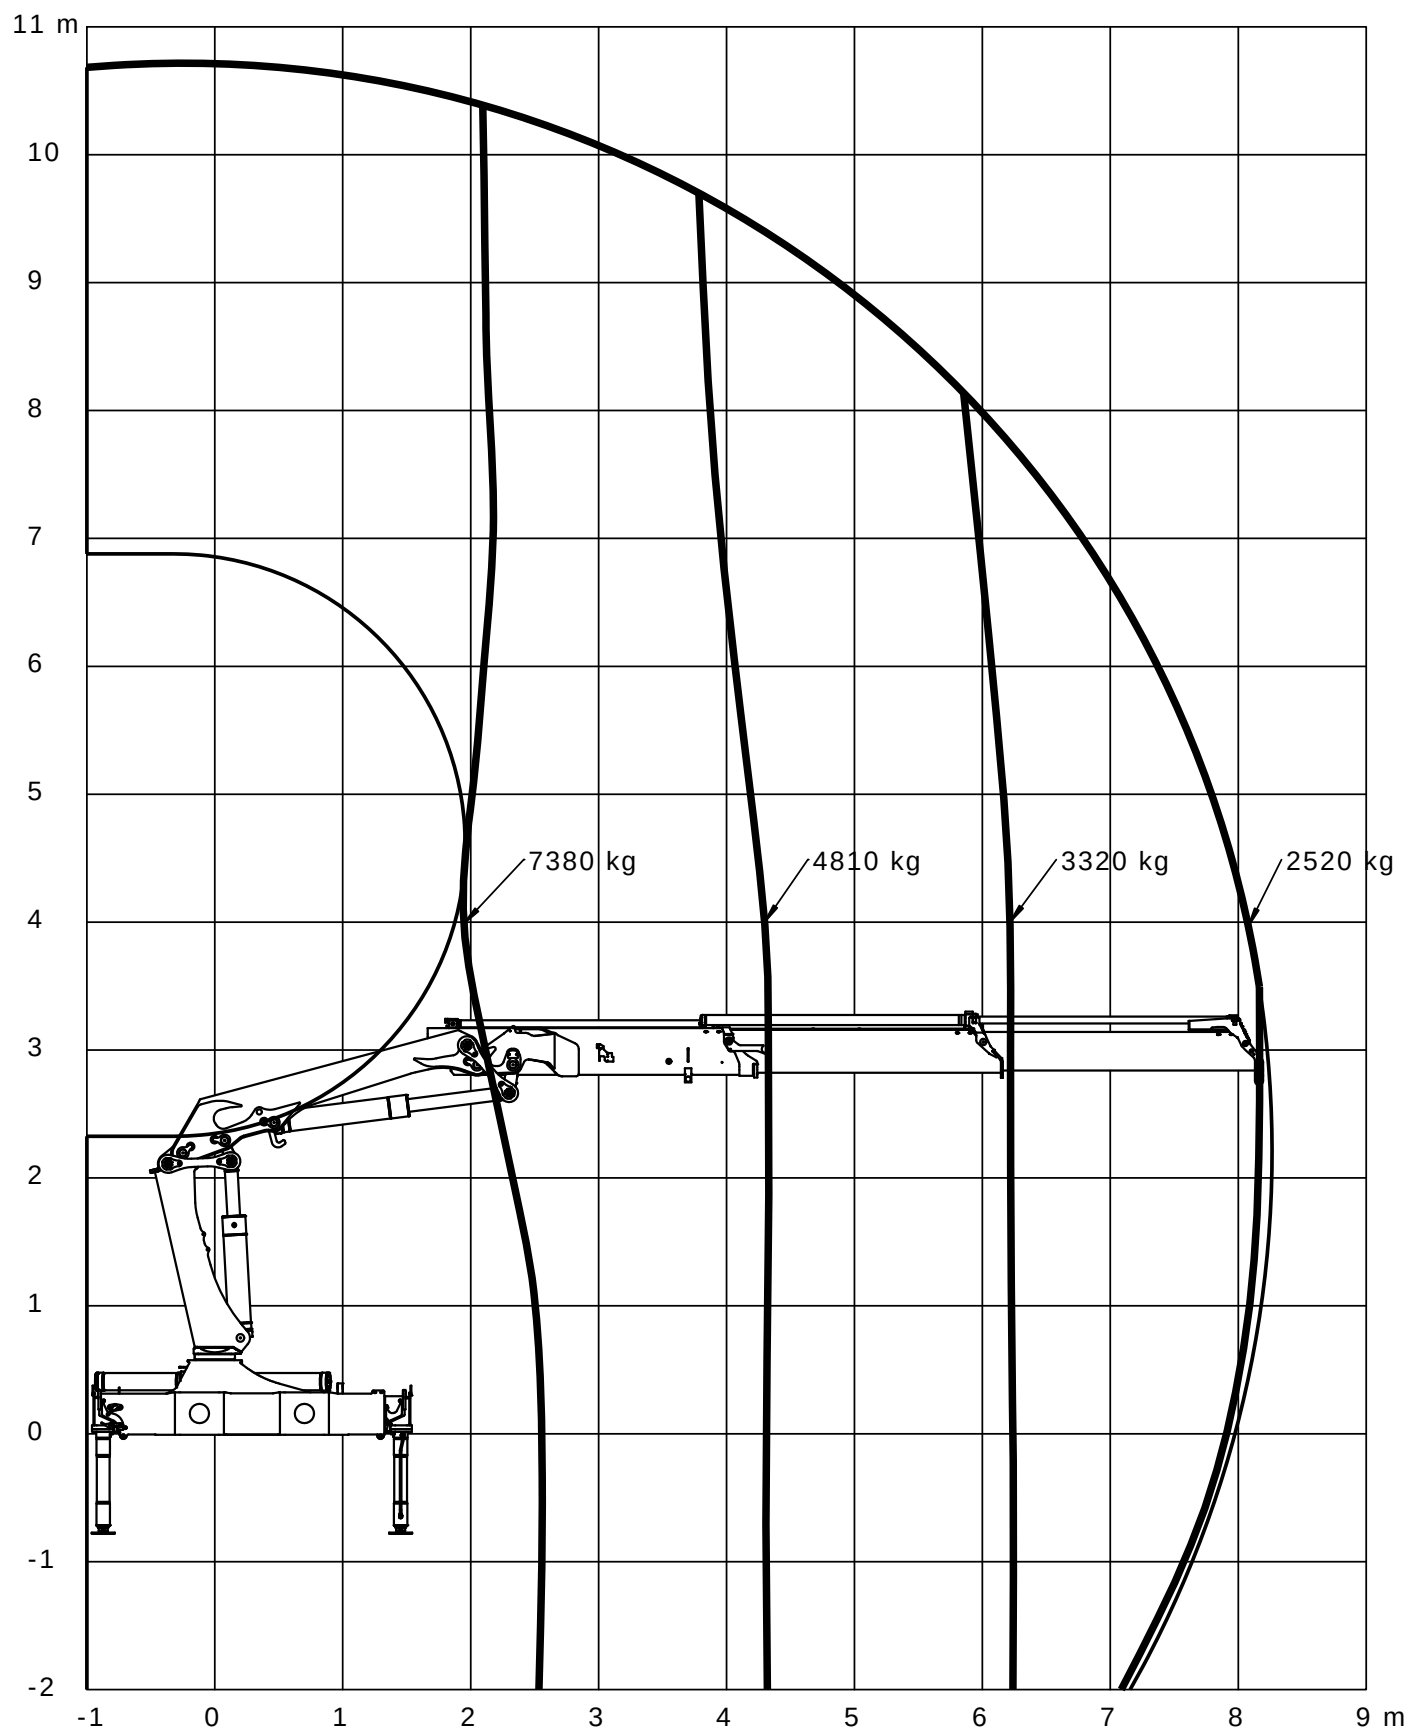

Loading group: EN12999 H1/B3

Lifting capacity diagram, K3

Catalogue no.

31 129

Section


223

Date

30-10-2018

Page

1 (1)

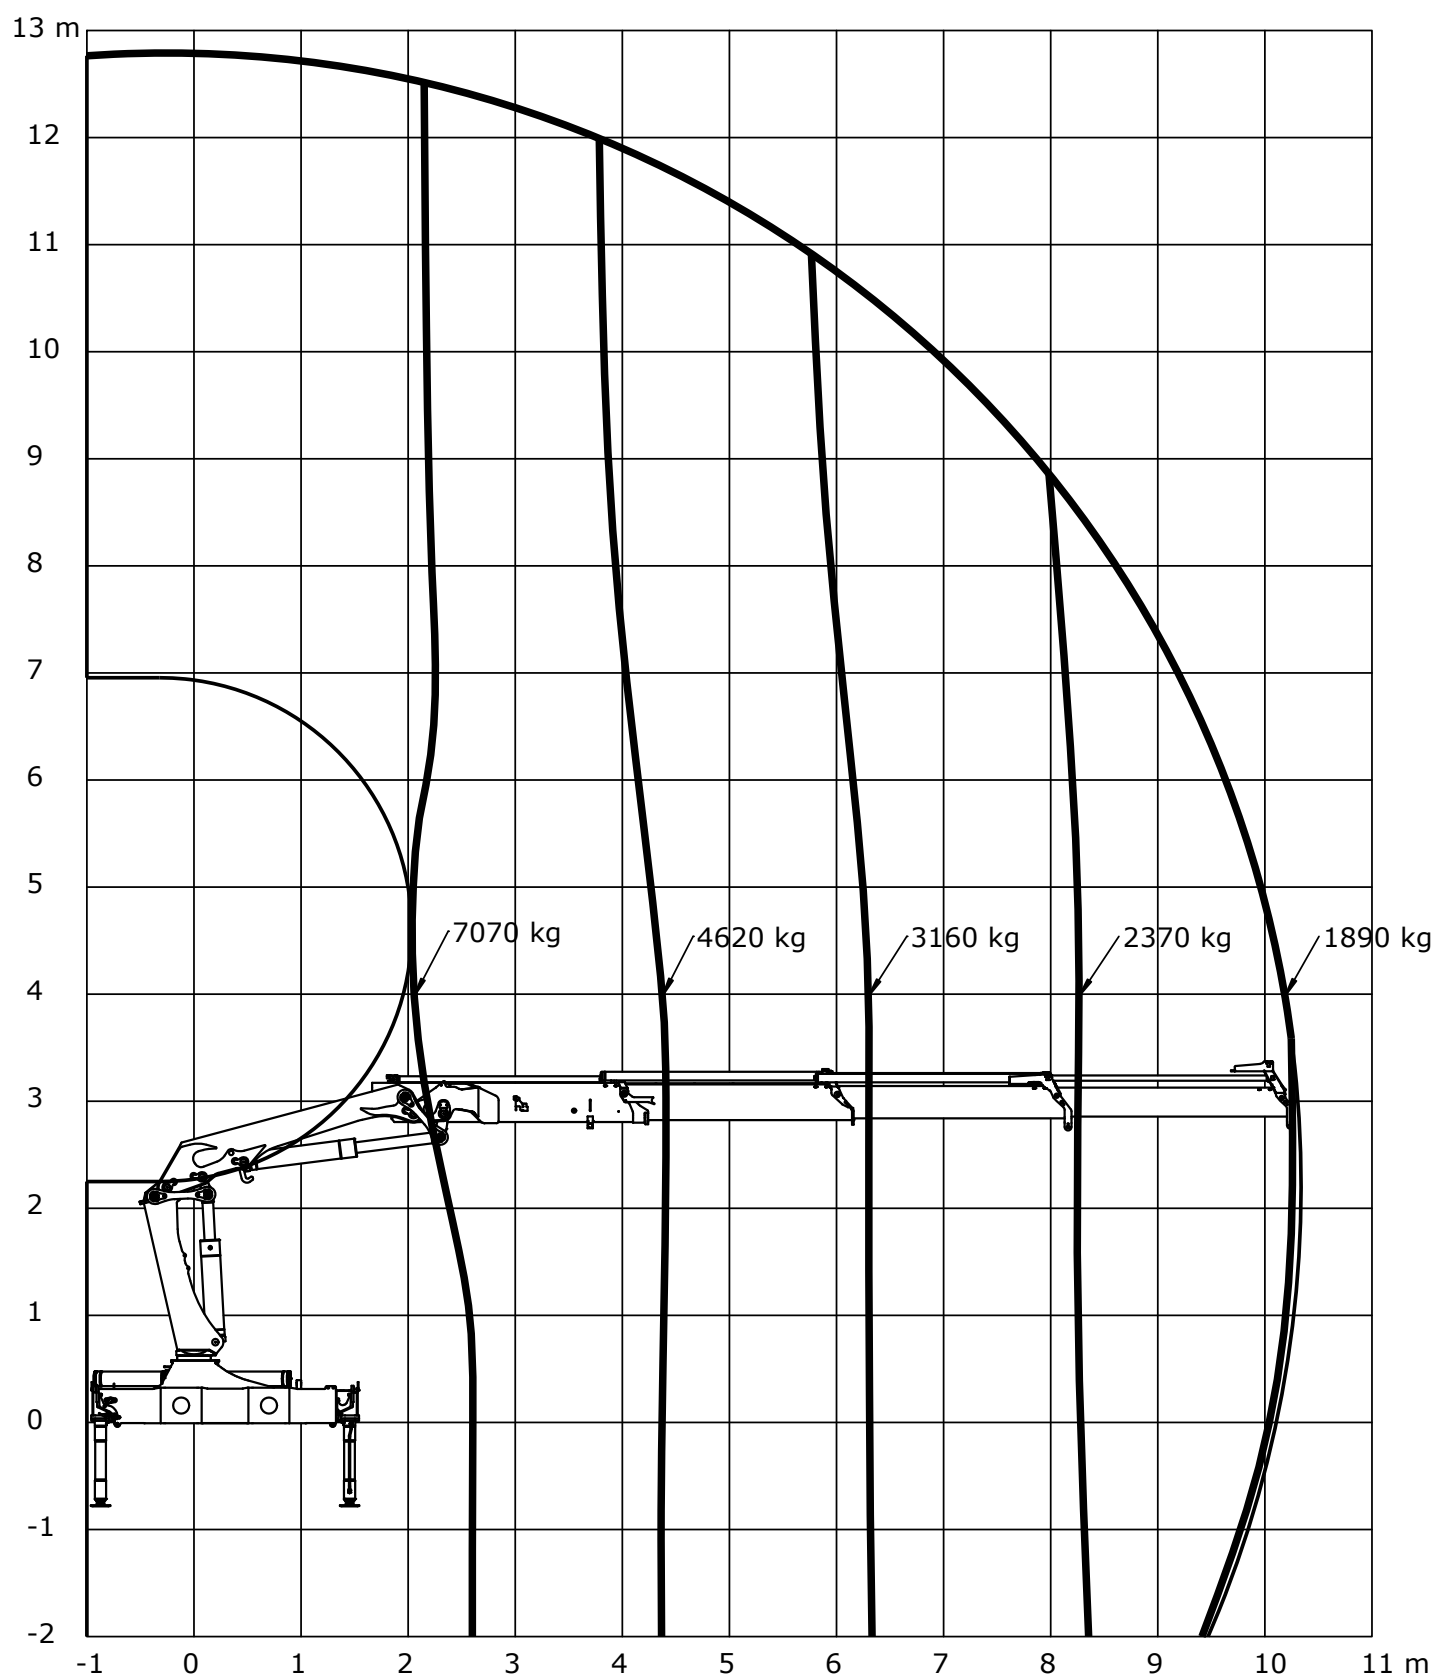

Loading group: EN12999 H1/B3

Lifting capacity diagram, K4

Catalogue no.

31 129

Section


224

Date

31-08-2018

Page


1 (1)

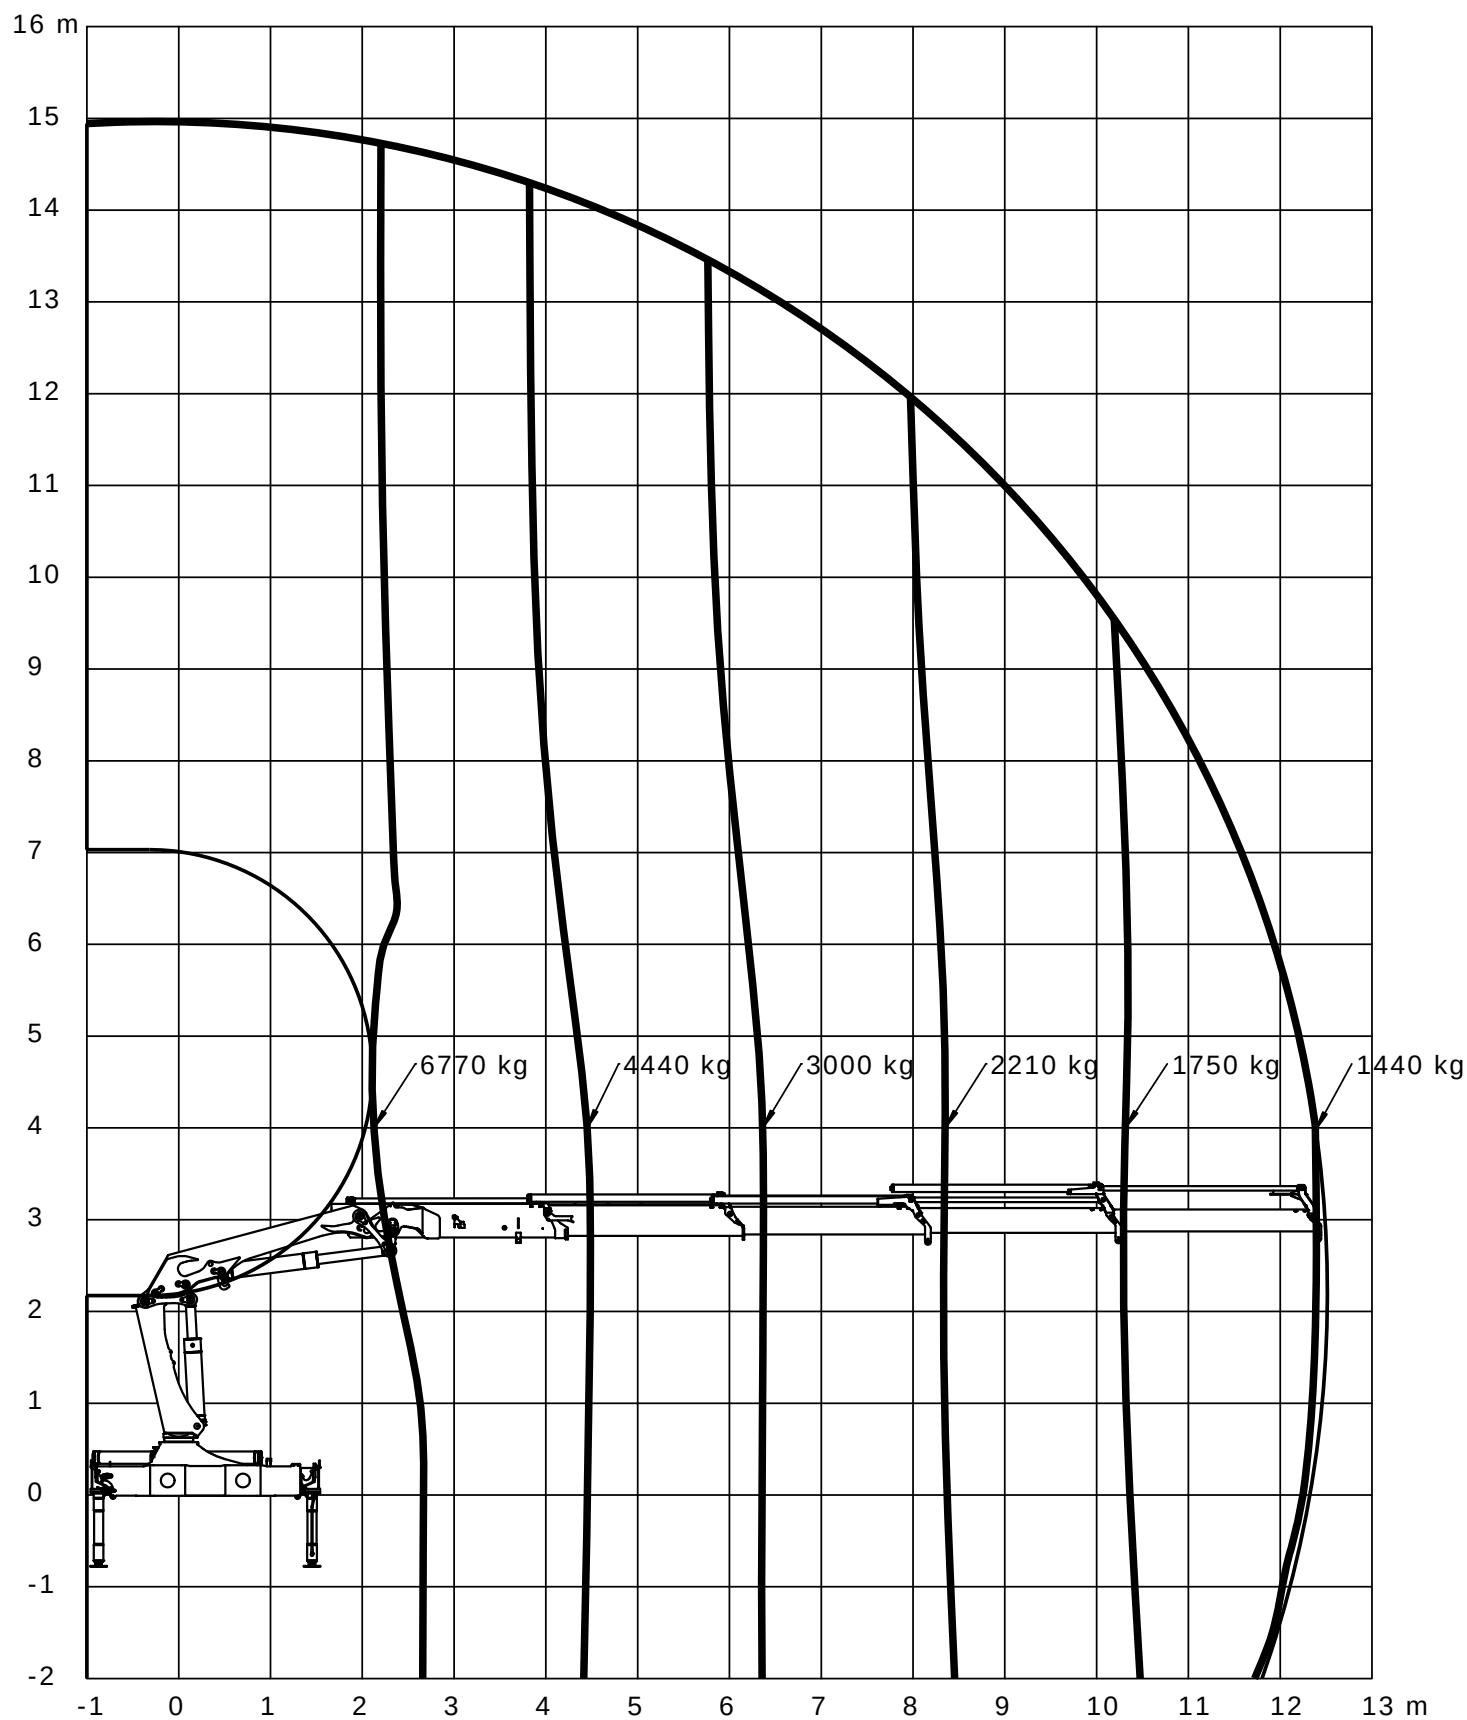

Loading group: EN12999 H1/B3

Lifting capacity diagram, K5

Catalogue no.	Section
31 129	225
Date	Page
31-08-2018	1 (1)

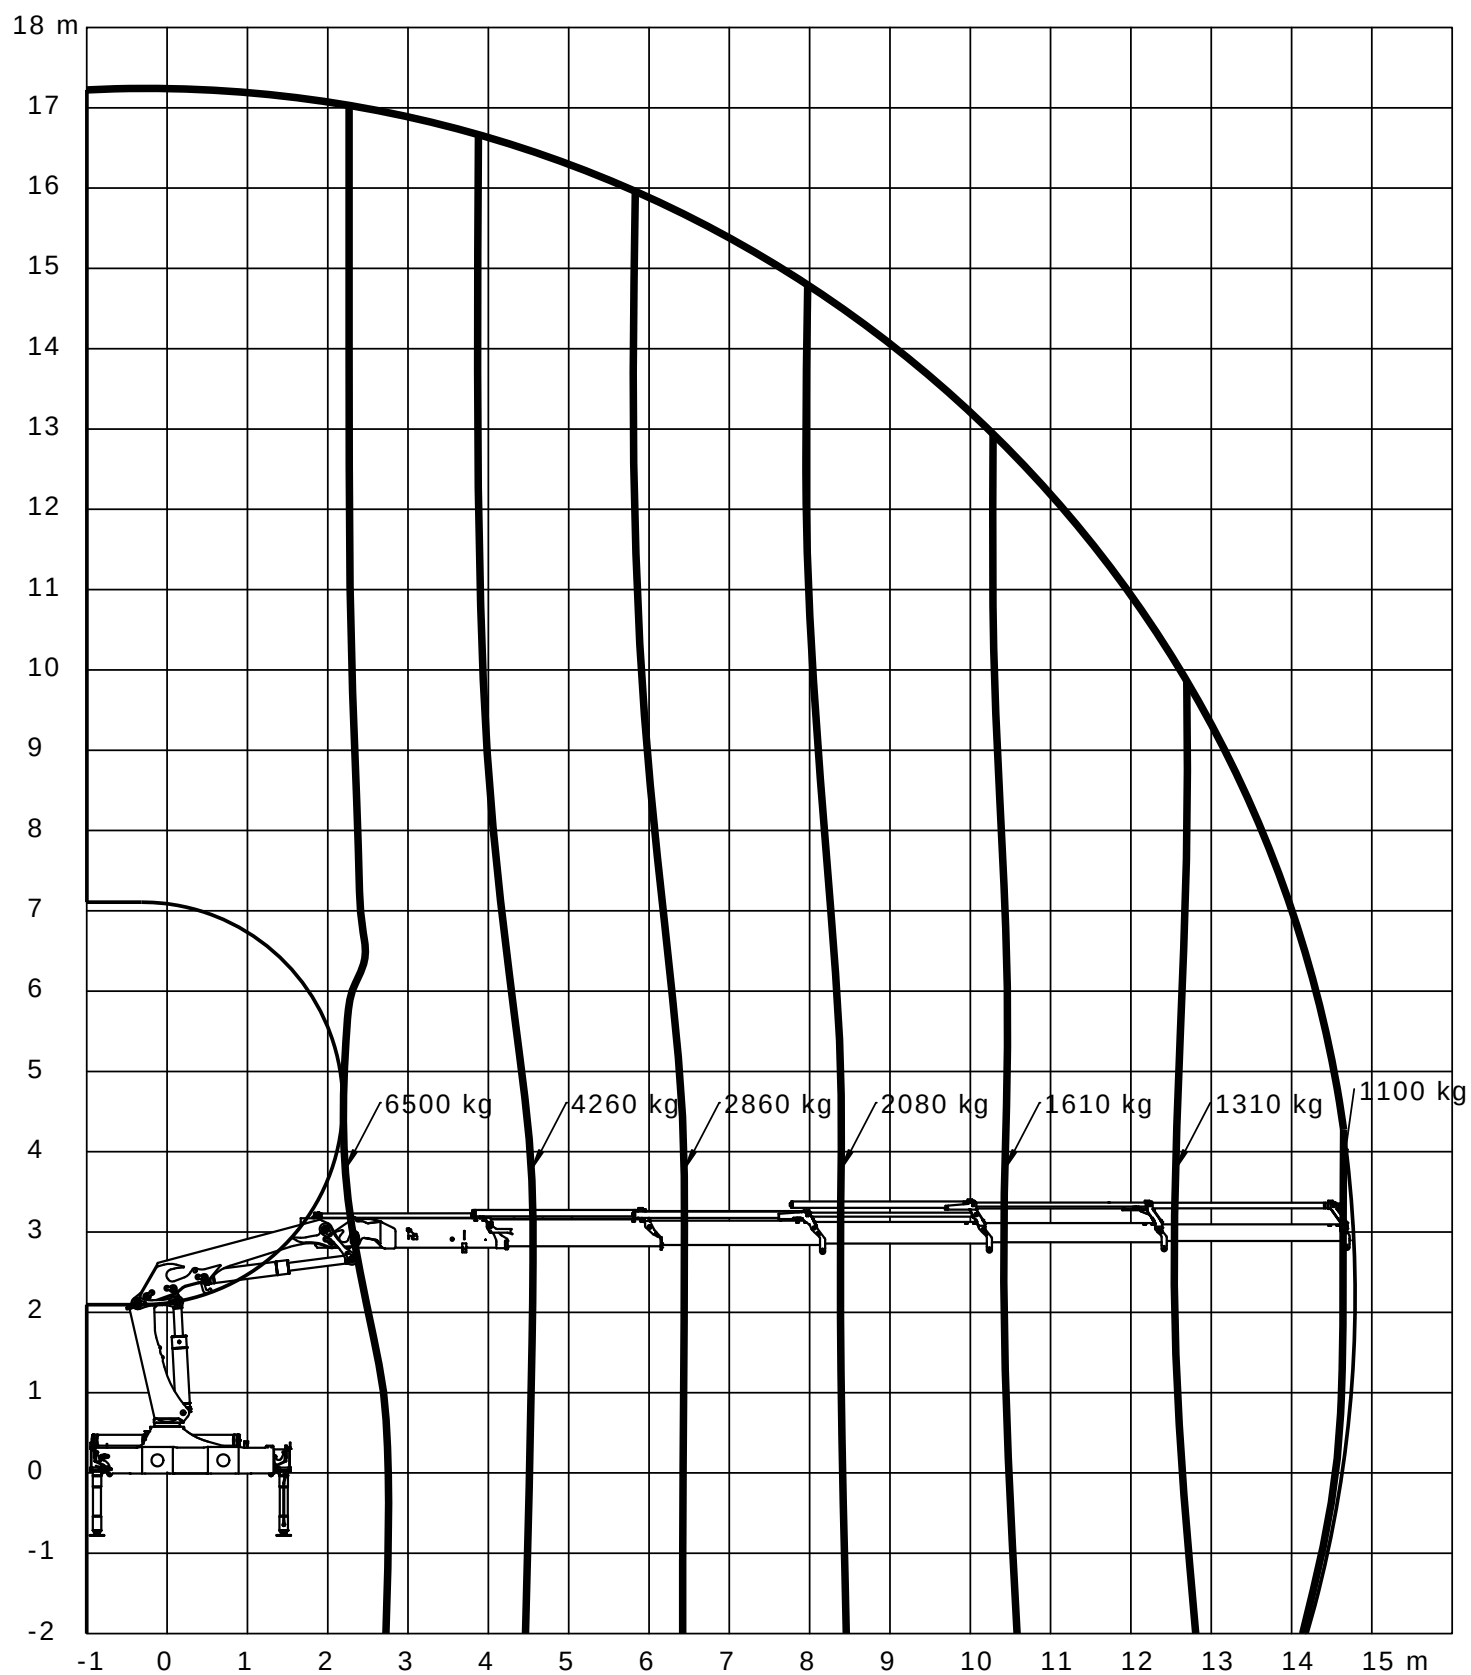

Loading group: EN12999 H1/B3

Lifting capacity diagram, K6

Catalogue no.

31 129

Section


226

Date

31-08-2018

Page

1 (1)

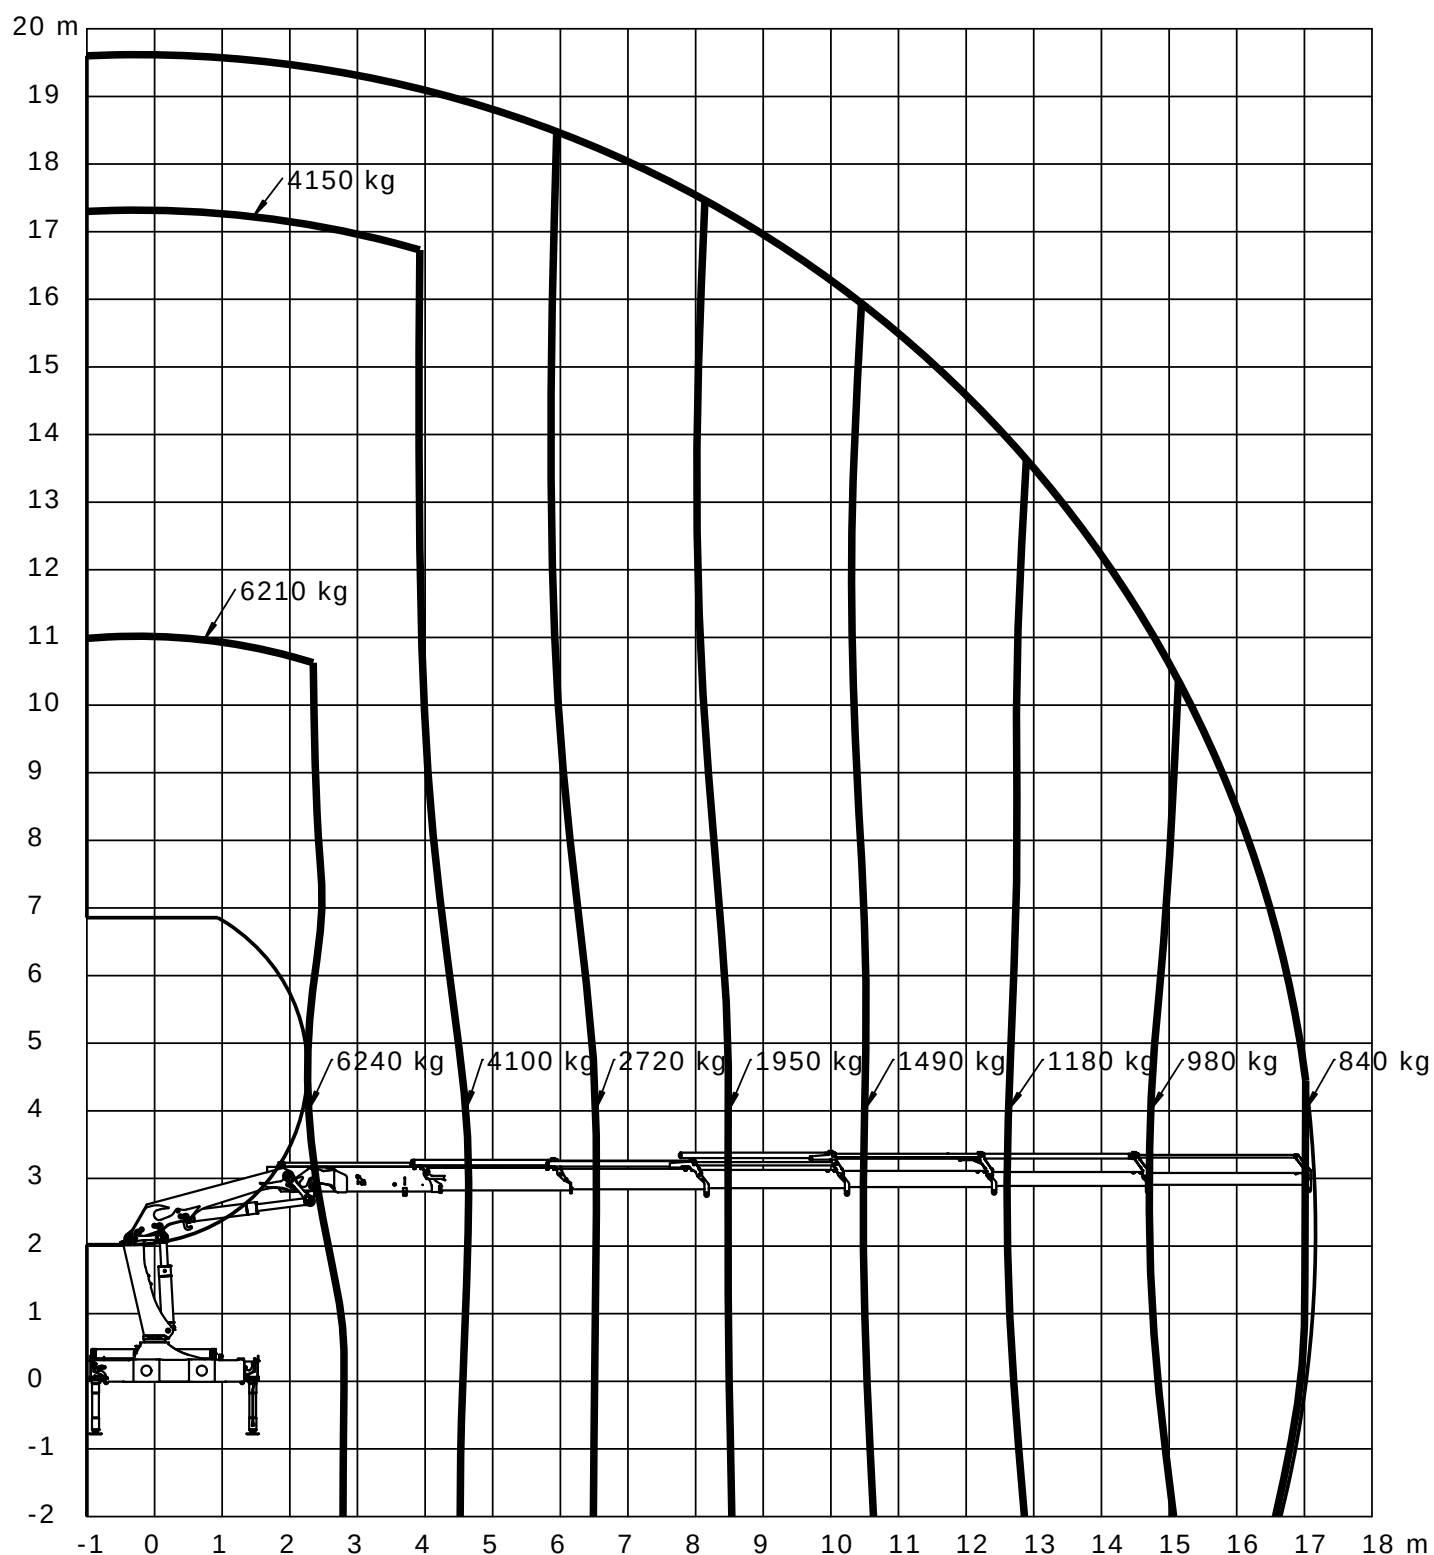

Loading group: EN12999 H1/B3

Lifting capacity diagram, K7

Catalogue no.

31 129

Section


227

Date

31-08-2018

Page

1 (1)

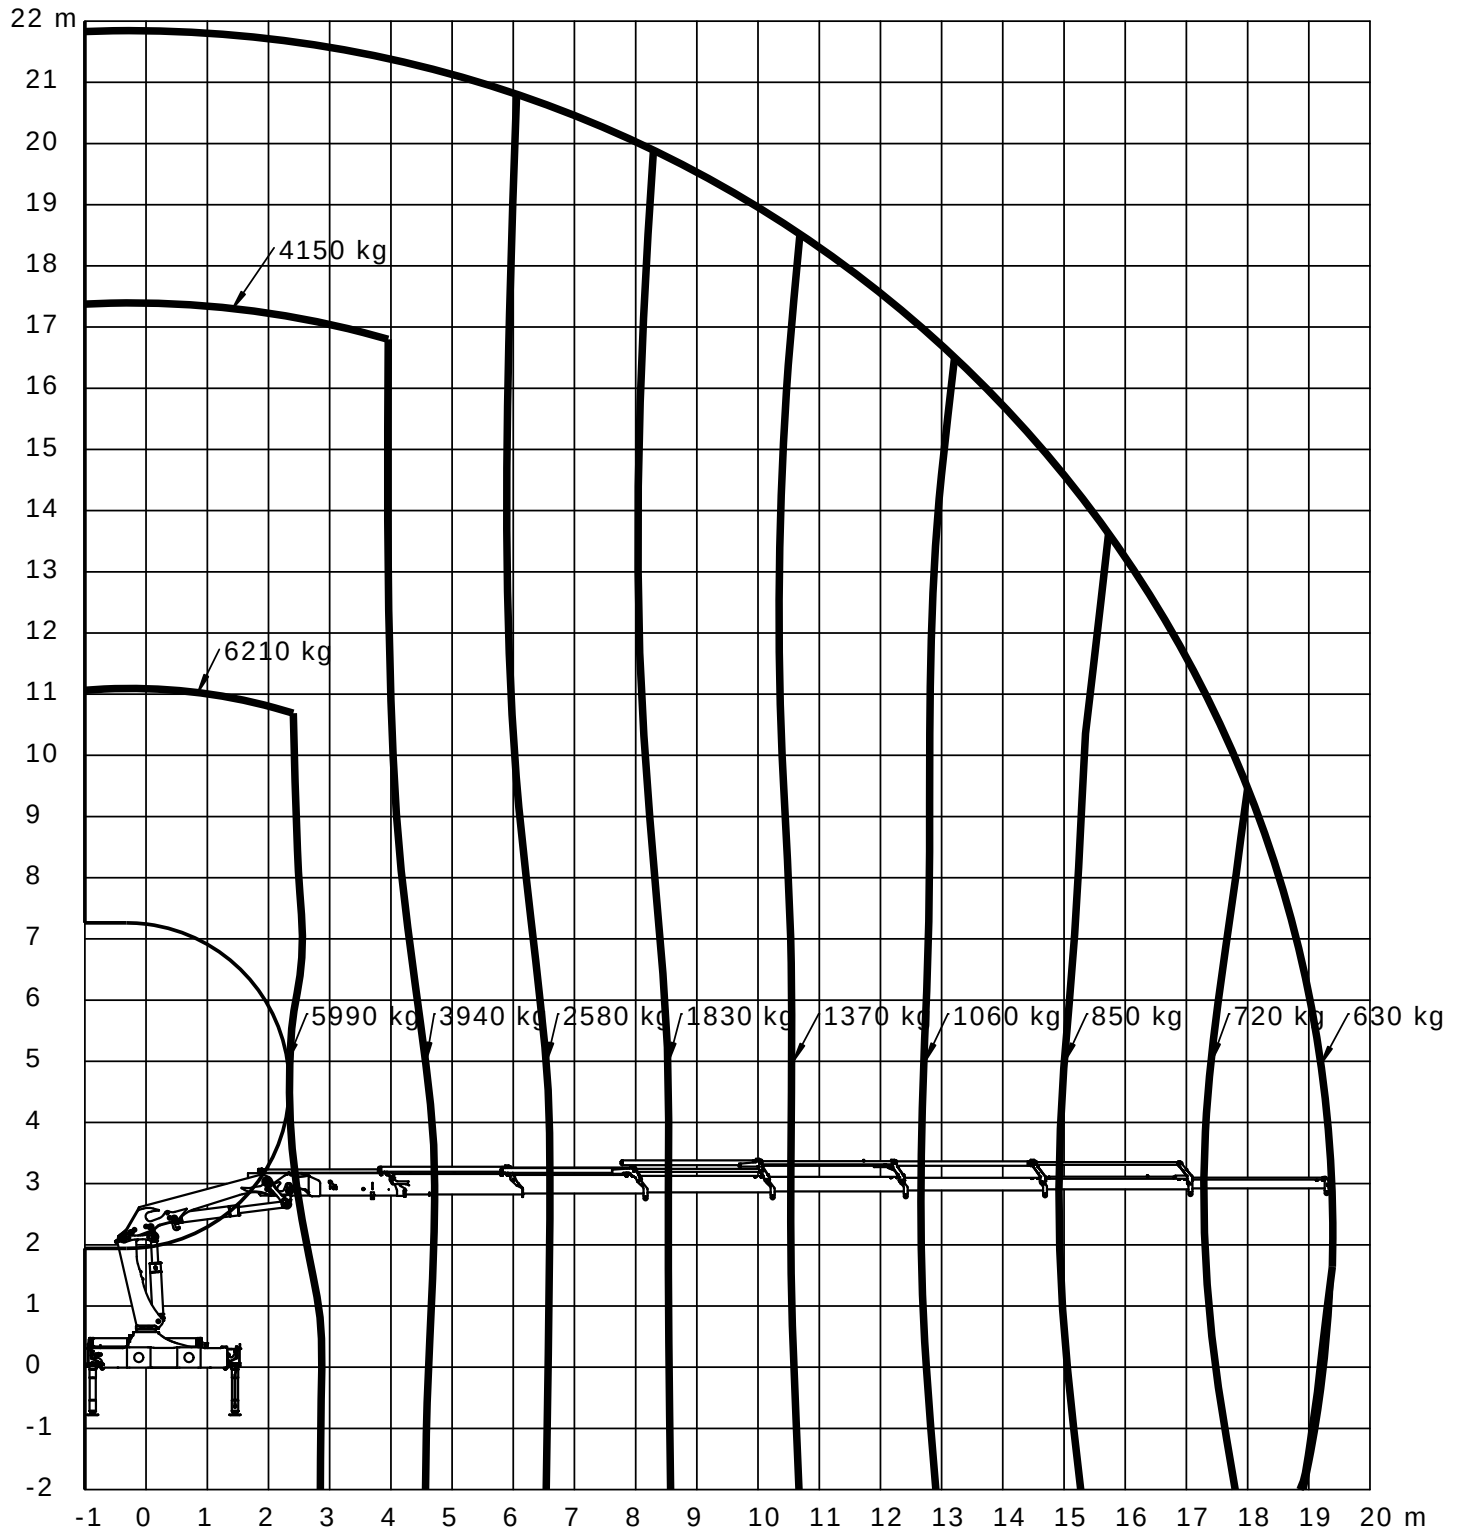

Loading group: EN12999 H1/B3

- power to lift.

Lifting capacity diagram, K8

Catalogue no.

31 129

Section


228

Date

31-08-2018

Page

1 (1)

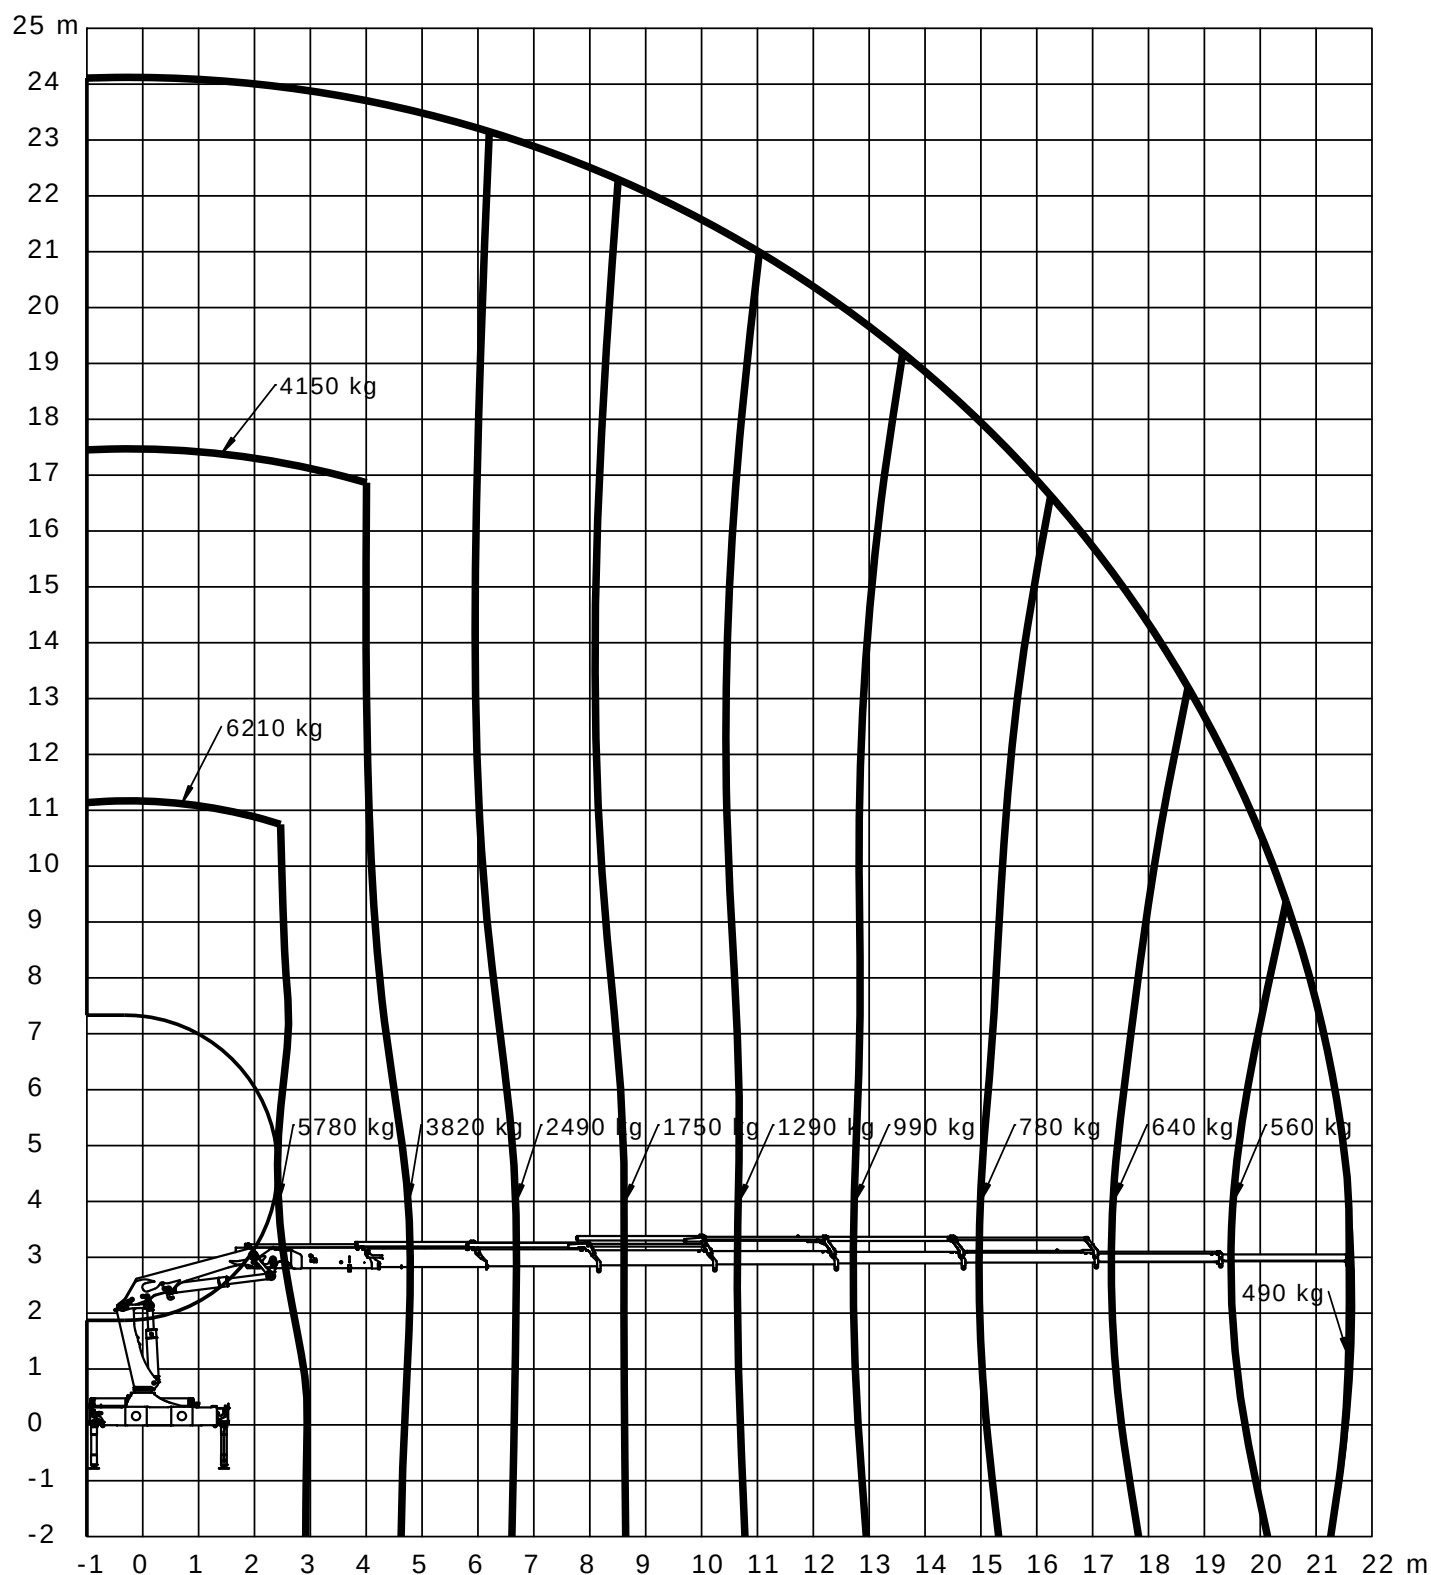

Loading group: EN12999 H1/B3

Lifting capacity diagram, 2320-K3 with FJ700 K3

Catalogue no.

31 129

Section


253

Date

31-08-2018

Page

1 (1)

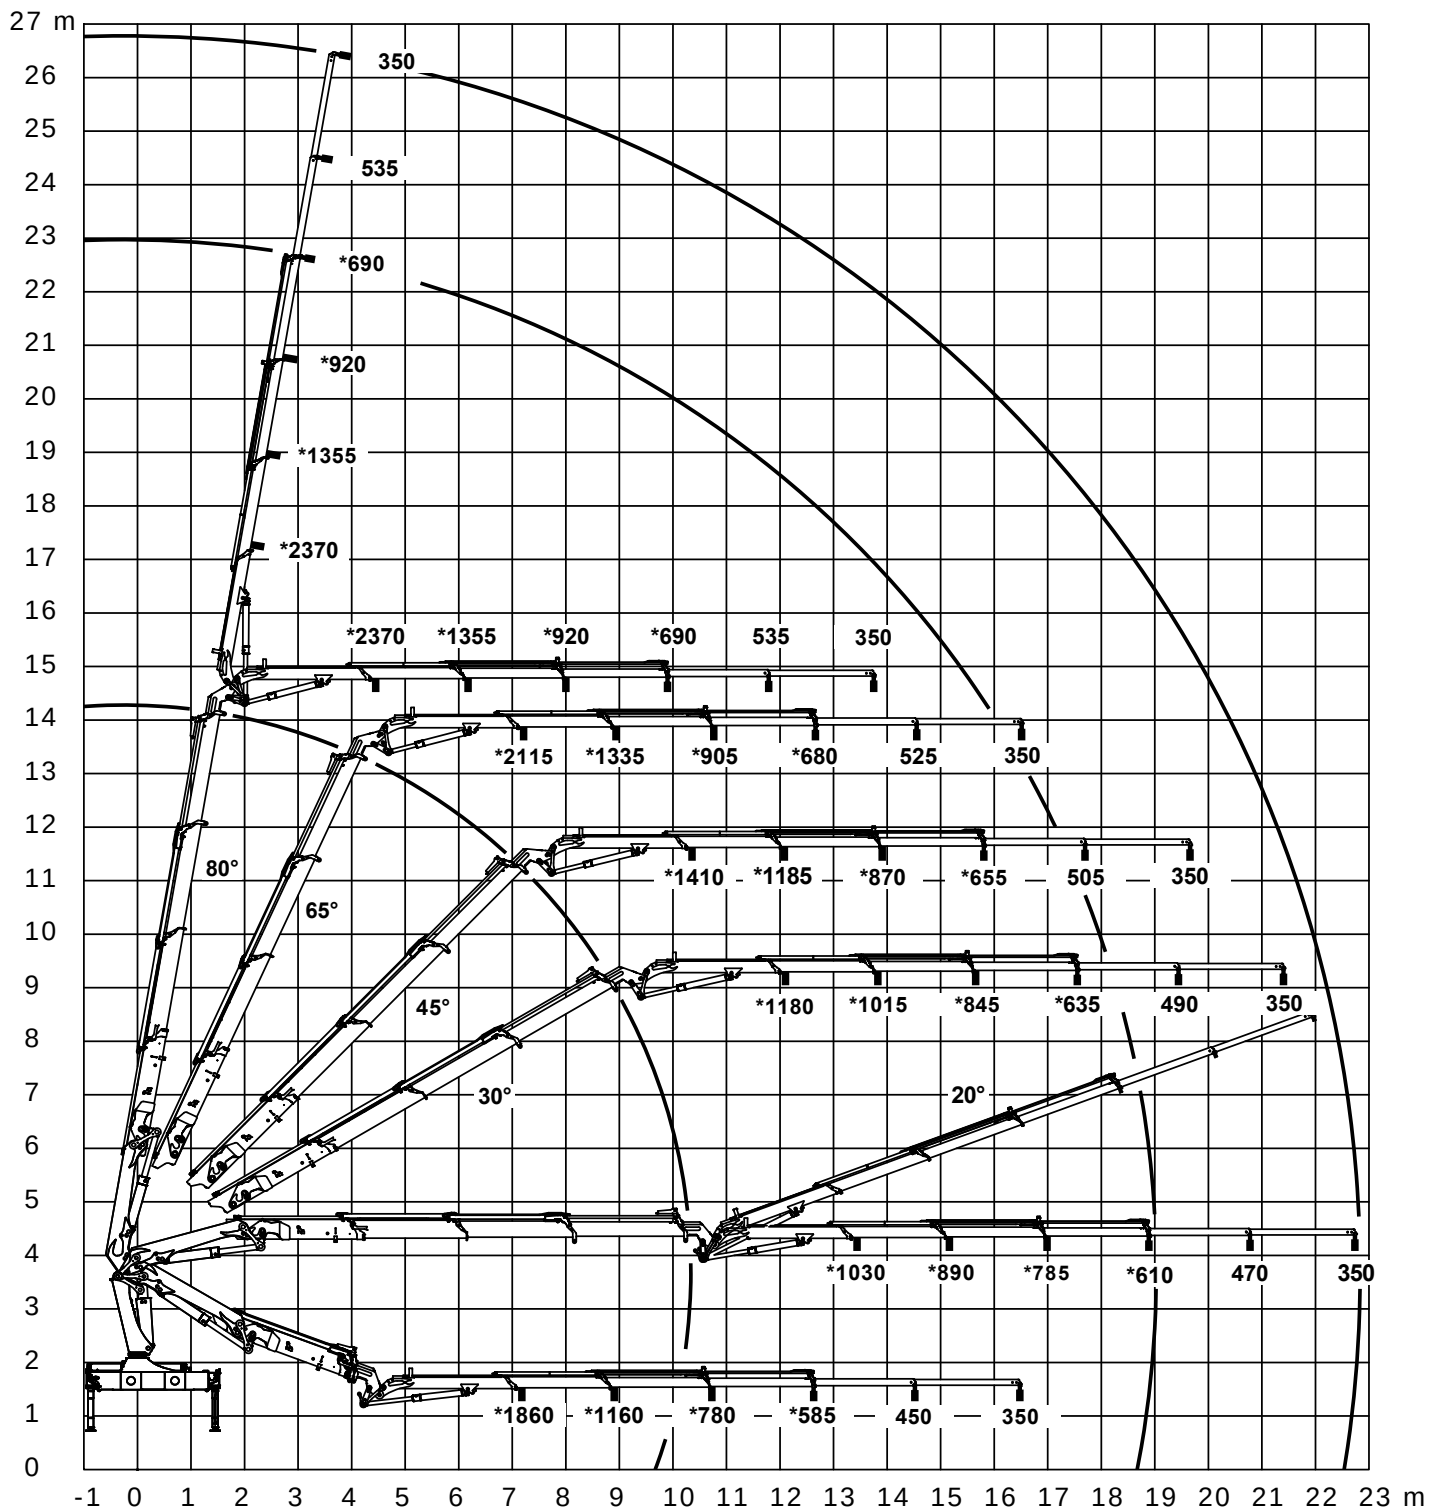

*Uden forlængerarme
 *Without manual extensions
 *Ohne Verlängerungen



Lifting capacity diagram, 2320-K3 with FJ700 K4

Catalogue no.

31 129

Section


254

Date

31-08-2018

Page

1 (1)

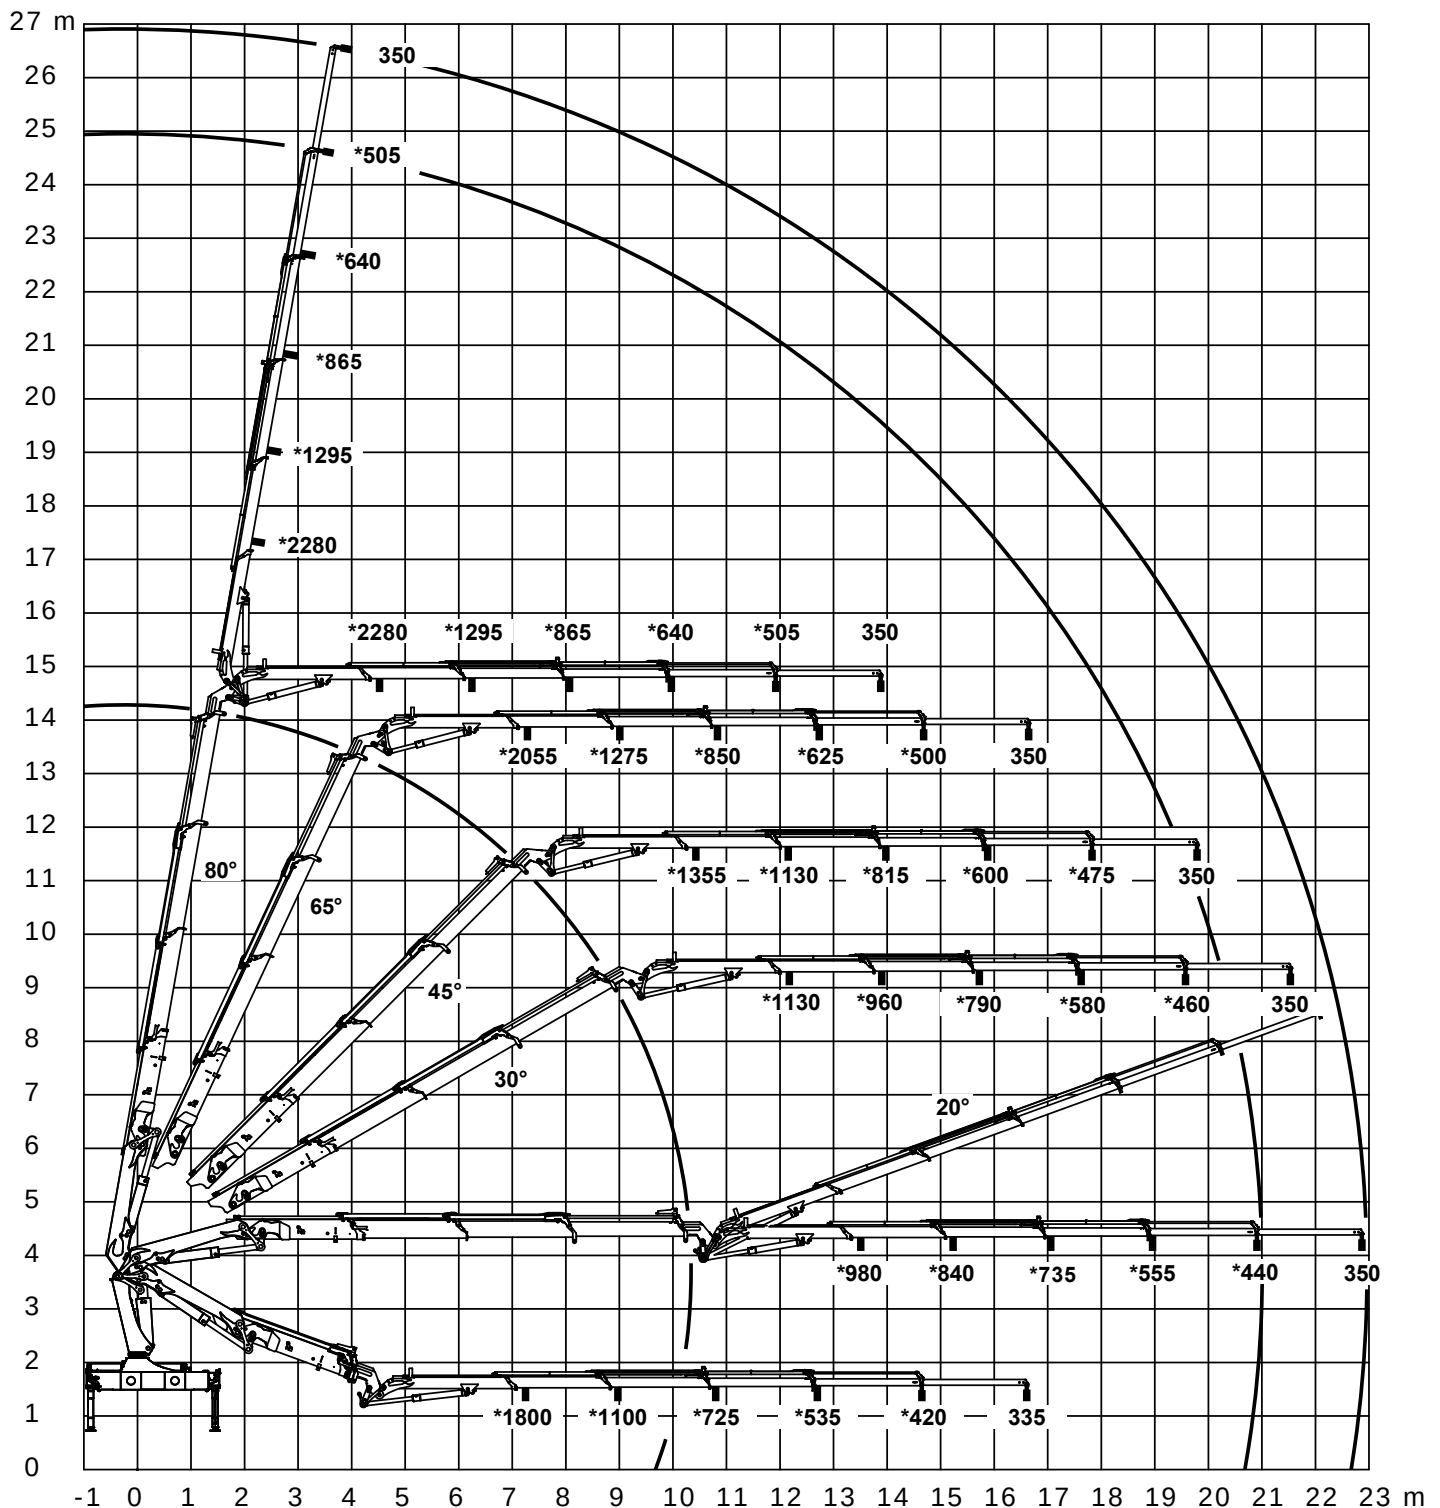

*Uden forlængerarme
 *Without manual extensions
 *Ohne Verlängerungen

Lifting capacity diagram, 2320-K4 with FJ700 K3

Catalogue no.

31 129

Section


255

Date

31-08-2018

Page

1 (1)

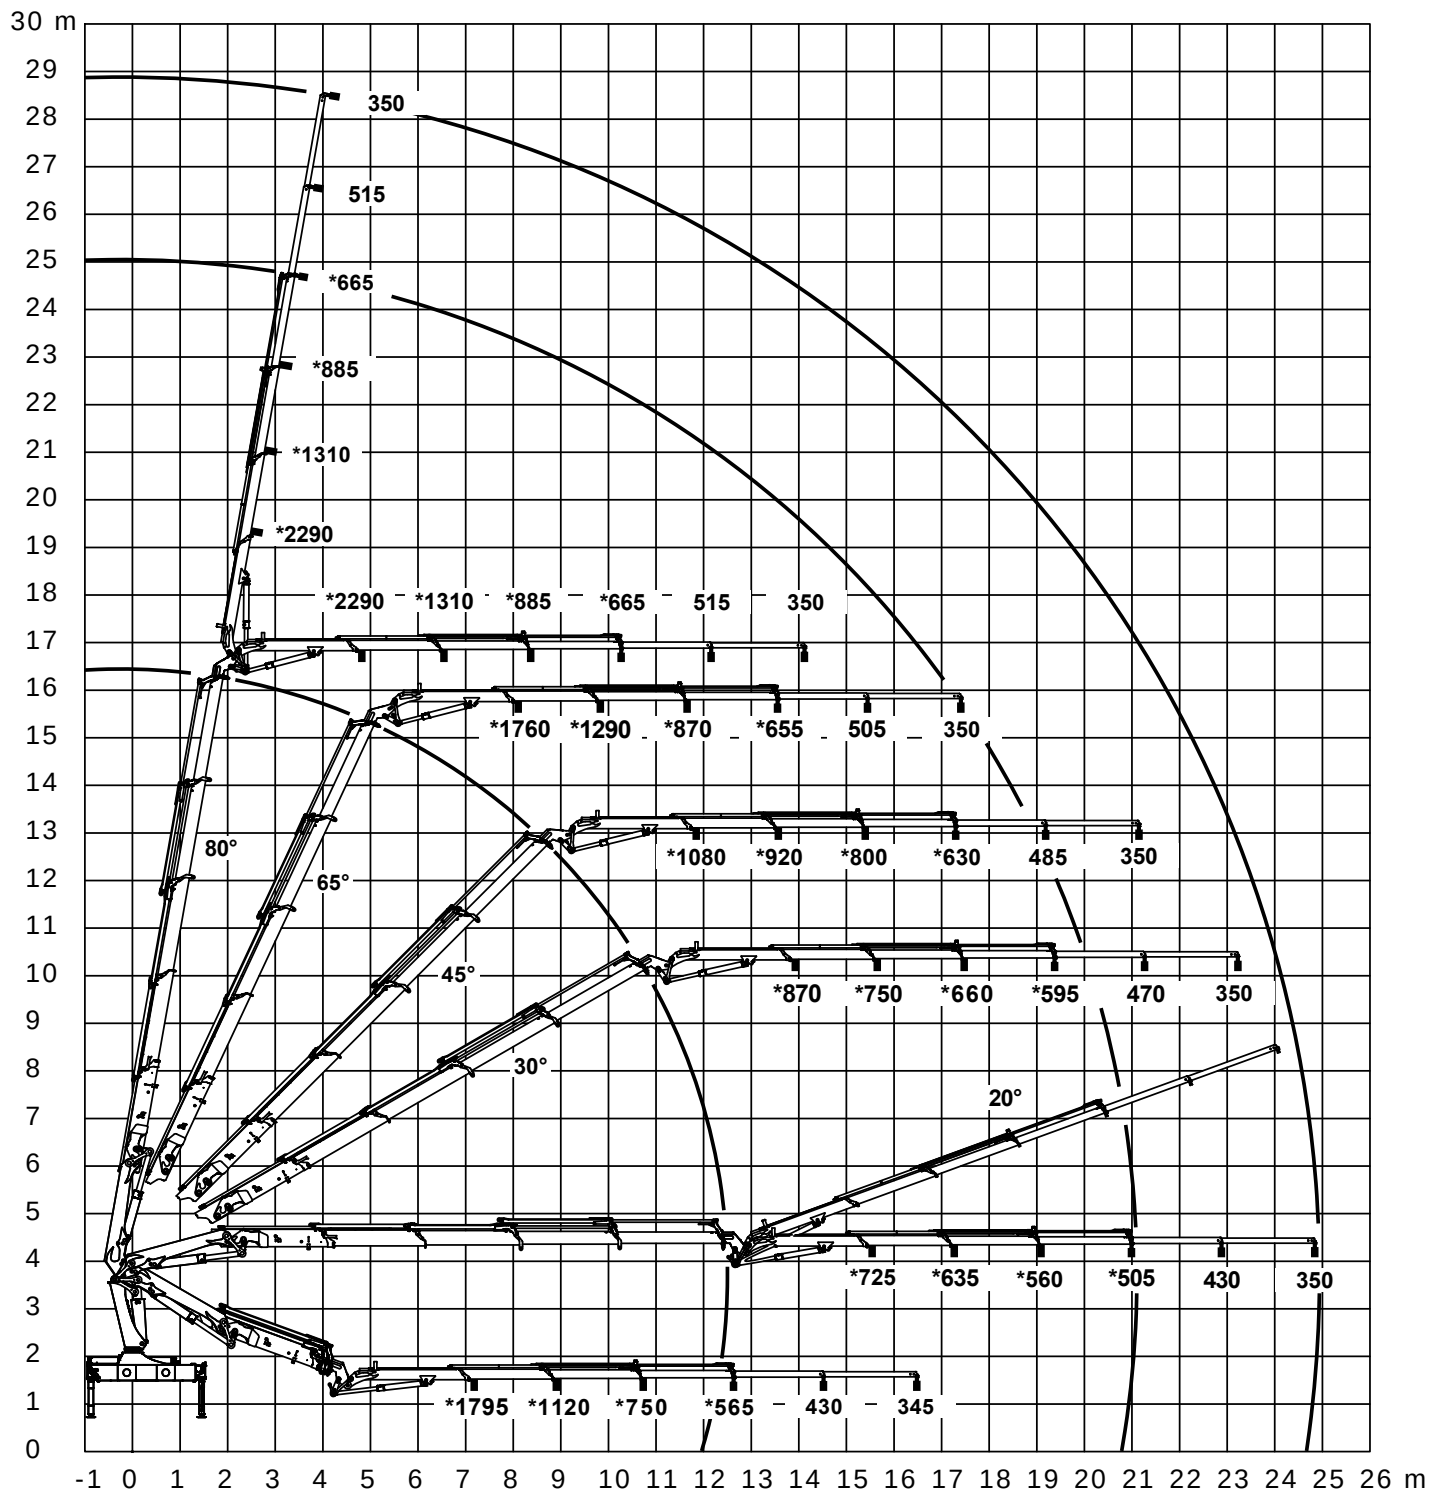

*Uden forlængerarme
 *Without manual extensions
 *Ohne Verlängerungen

Lifting capacity diagram, 2320-K4 with FJ700 K4

Catalogue no.

31 129

Section


256

Date

31-08-2018

Page

1 (1)

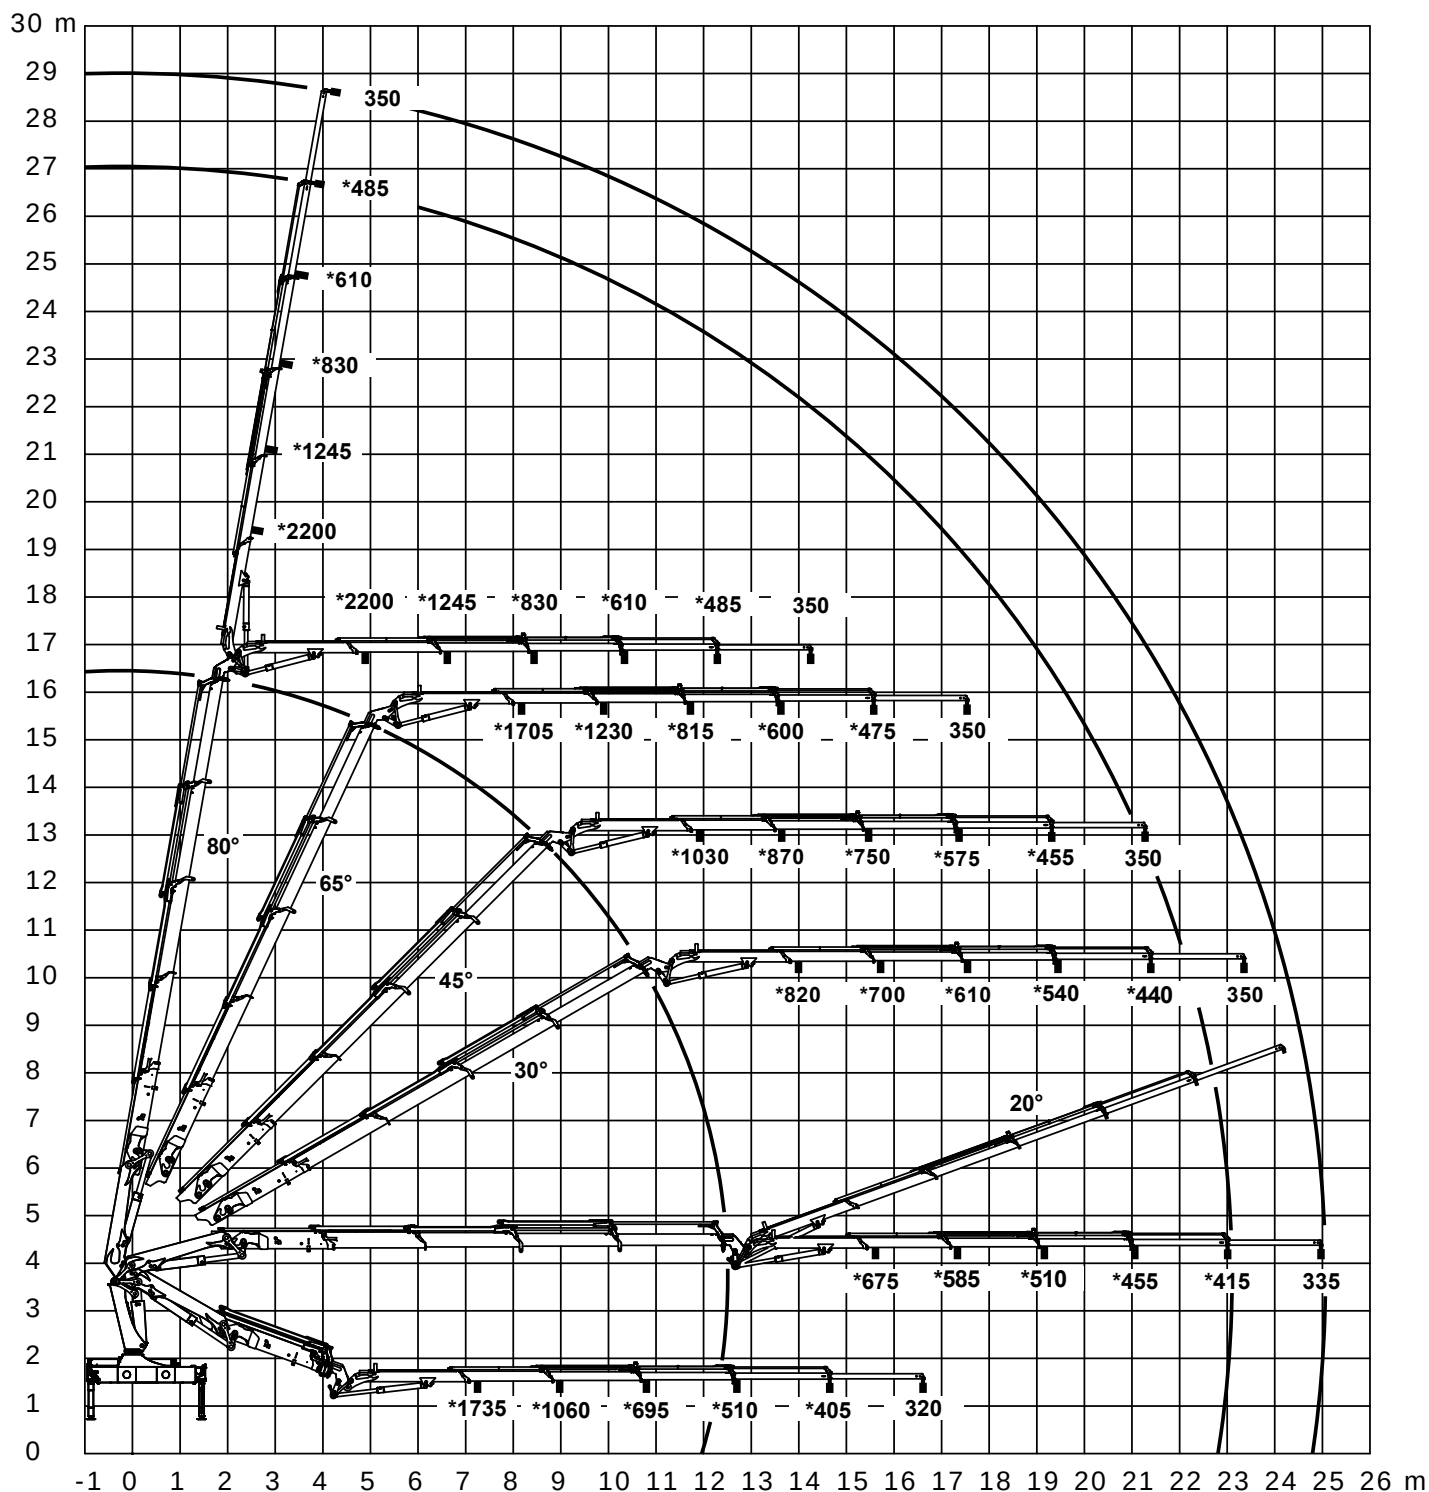

*Uden forlængerarme

*Without manual extensions

*Ohne Verlängerungen

- power to lift.

